

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
11 July 2002 (11.07.2002)

PCT

(10) International Publication Number
WO 02/053654 A2

(51) International Patent Classification⁷: **C09B 67/22**,
67/04

(US). **BERG, Barbara**; 1467 Sigma Circle, Cincinnati, OH 45255 (US). **MCLAREN, George**; 8595 E. Jonathan Lane, Maineville, OH 45039 (US). **SCHWARTZ, Russell, J.**; 8300 Monte Drive, Montgomery, OH 45242 (US).

(21) International Application Number: PCT/US02/00045

(22) International Filing Date: 4 January 2002 (04.01.2002)

(74) Agent: **PERSLEY, Sidney**; 222 Bridge Plaza South, Fort Lee, NJ 07024 (US).

(25) Filing Language: English

(81) Designated States (*national*): BR, CA.

(26) Publication Language: English

(84) Designated States (*regional*): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).

(30) Priority Data:
09/755,494 5 January 2001 (05.01.2001) US

(71) Applicant: **SUN CHEMICAL CORPORATION**
[US/US]; 222 Bridge Plaza South, Fort Lee, NJ 07024 (US).

Published:
— without international search report and to be republished upon receipt of that report

(72) Inventors: **SMITH, Norman**; 1085 Newcastle Drive, Cincinnati, OH 45231 (US). **CHAMBERLAIN, Terrence**; 11710 Laurelview Drive, Montgomery, OH 45249

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.



WO 02/053654 A2

(54) Title: PREPARATION OF HEAT STABLE PIGMENT VIOLET 23

(57) Abstract: A process for improving the heat stability of Pigment Violet 23 by conditioning crude Pigment Violet 23 in the presence of about 1 to 10 wt.% of Pigment Violet 23 by-products (1, 2 and 3).

PREPARATION OF HEAT STABLE PIGMENT VIOLET 23


5 FIELD OF THE INVENTION

The invention relates to an improved process for preparing a heat stable pigment violet 23.

BACKGROUND OF THE INVENTION

10 Pigment violet 23 has been known for decades and in the course of this time has acquired a very great importance because of its outstanding properties as a colorant. It is therefore manufactured on an industrial scale in large quantities. As long as the colorant has been known, the principal features of its
15 manufacture have remained the same. It is typically synthesized by reacting chloranil (tetrachloro-p-benzoquinone) with 3-amino-9-ethylcarbazole to give 2,5-di-(9-ethylcarbazol-3-ylamino)-3,6-dichloro-1, 4-benzoquinone. This is followed by cyclisation to give the pigment violet 23. (See Venkataraman,
20 The Chemistry of Synthetic Dyes, Volume II (1952), pages 786 and 787). The following equations serves to illustrate the synthetic reaction scheme:

25

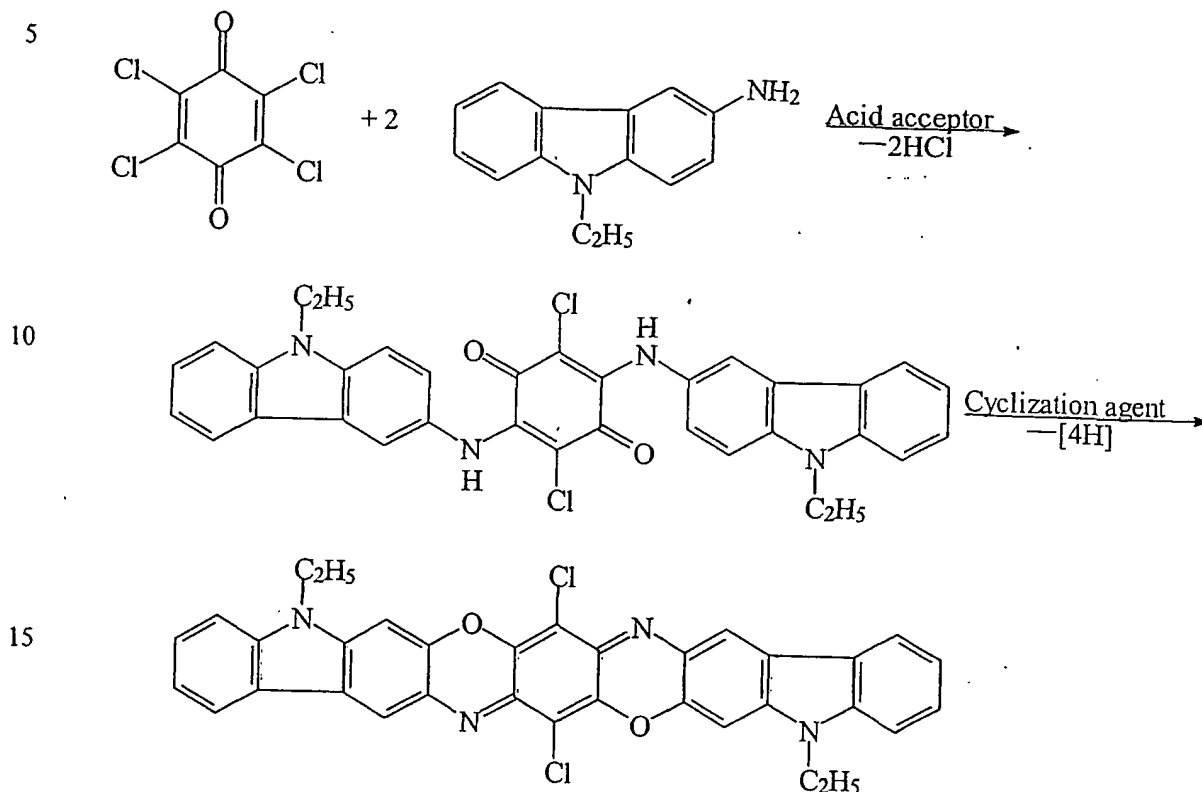

20 While many variations in the solvents used and conditions of this reaction have been disclosed, invariably, the reaction also leads to the formation of several by-products that the prior art deemed contaminants. These by-products are normally washed away from the crude pigment violet 23 before any


25 conditioning (i.e. heat stabilizing) of such crude occurs.

SUMMARY OF THE INVENTION

The present invention provides an improvement in the process for the conditioning of pigment violet 23 having the


30 formula:

5

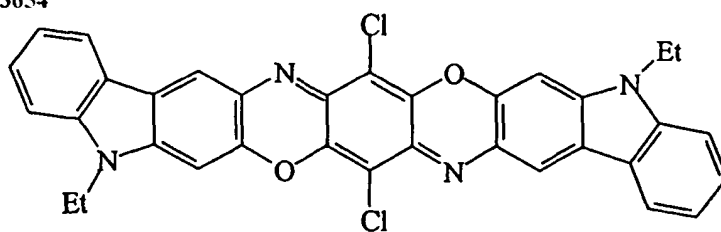


10 the improvement comprises carrying out said conditioning in the presence of about 1 to about 10 wt.%, preferably about 5 to 8 wt.%, relative to the weight of the crude pigment, of at least one compound selected from the group consisting of:

15

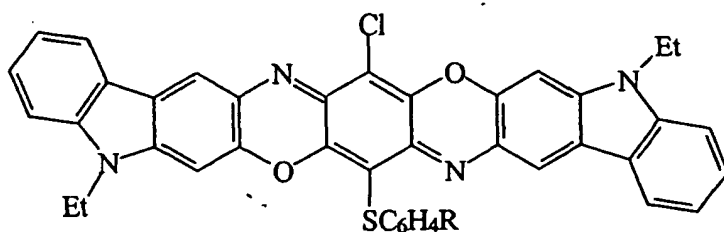


(1);

20

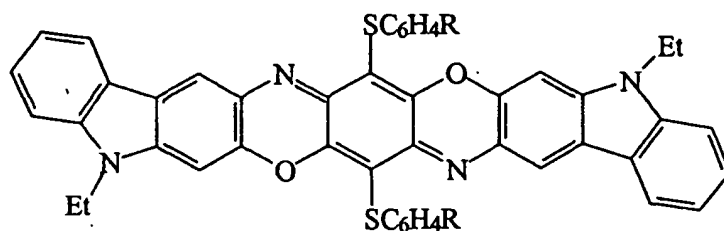

(2); and


25

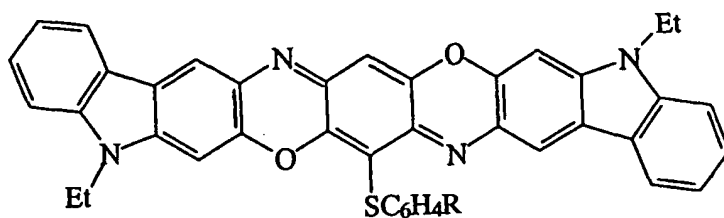


(3).

30 wherein each R is independently selected from either H or CH_3 .


violet 23 product is conditioned in the presence of about 1-10 wt.% of at least one of the following compounds:

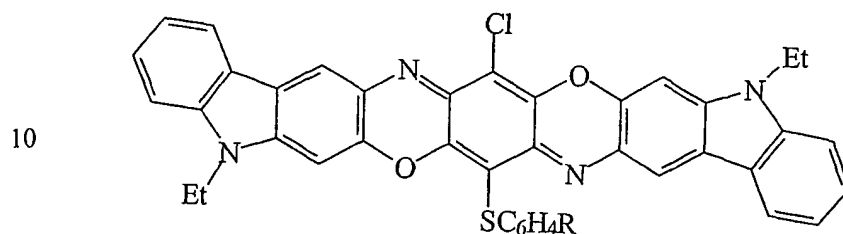

(1);

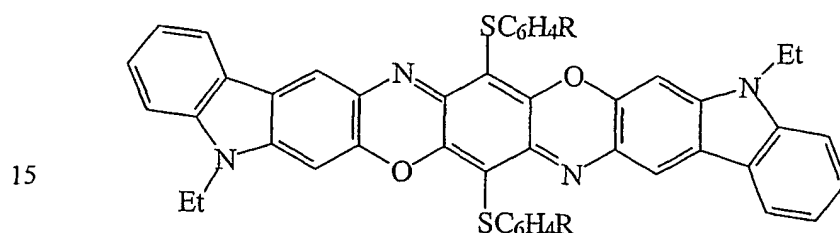

(2); and

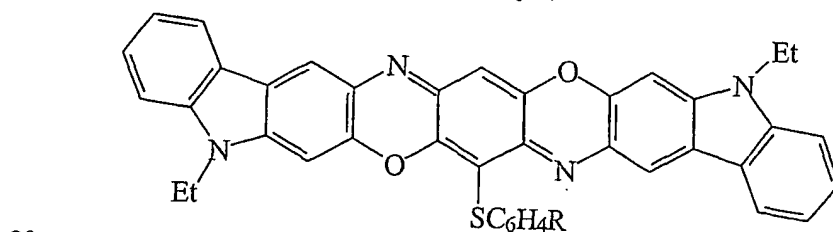


(3)

wherein each R is independently selected from either H or CH₃.

25 The conditioning of crude pigment violet 23 may be carried out by various processes such as by grinding the crude pigment in the presence of a grinding agent and an organic solvent. Preferably, the grinding agent is sodium chloride and the organic solvent is diethylene glycol.

30 Compounds 1, 2 and 3 are formed in final step in commercial preparation of pigment violet 23 crude which involves ring closure of the intermediate di-anil (4)

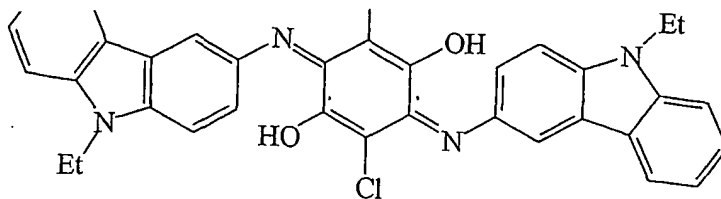

10 using benzenesulfonyl chloride or p-toluenesulfonyl chloride (or other arylsulfonyl chlorides).

It is well known that cyclization of the di-anil intermediate (4) during the synthesis of crude violet 23 results in the concurrent formation of by-product compounds (1), (2) and
15 (3). More specifically, in compounds (1), (2) and (3), R is H when benzenesulfonyl chloride is employed as the cyclizing agent and R is CH₃ when p-toluenesulfonyl chloride is employed as the cyclizing agent. Alternatively, a mixture of (1), (2) and (3) can be produced wherein R is a mixture of H and CH₃.

20 This is the case when a mixture of benzenesulfonyl chloride and p-toluenesulfonyl chloride are employed as cyclization agents. When aryl sulfonyl chlorides including other isomers of toluenesulfonyl chlorides, naphthalenesulfonyl chlorides, anthracenesulfonyl chlorides or other aryl systems are employed
25 as the cyclization agents, the corresponding by-products are also formed and result in the same heat stabilizing effect.

The amount of these by-products [i.e. compounds (1), (2), and (3)] retained in the isolated crude product may be
30 controlled by the washout procedure applied during the isolation/filtration process. Thus, rigorous washing with the hot reaction solvent will remove virtually all of the by-product

less rigorous washing conditions with preferably 1-10 wt.% retained. Alternatively, the appropriate level of (1), (2) or (3) by-product compounds or mixtures thereof (hereinafter referred to as "by-product mixture"), may be added to a purified
10 crude sample prior to its conditioning. The presence of at least one of compounds (1), (2) or (3) in an amount of about 1-10 wt.% causes significant inhibition of recrystallization during the conditioning process. The result is that pigments possessing these levels of by-products (or impurities) also
15 exhibit correspondingly higher surface areas.

For example, when a crude product containing <1 wt.% of at least one of compounds (1), (2) or (3) is conditioned, the resulting surface area is typically in the range of 85 to 95
20 m²/g. By contrast, when a crude product containing from about 1 to 10 wt.%, preferably from about 5 to 8 wt.% of at least one of compounds (1), (2) or (3) is conditioned, the resulting surface area is typically in the range of 115 to 125 m²/g. The superior heat stability of the latter product in plastic, compared to the
25 former is also due to the presence of one or more of these compounds. Thus, crystalline growth (or recrystallization) of the pigment is significantly inhibited, during the high temperature processing necessary for the coloration of plastics.

30 The examples that follow demonstrate that the heat stability exhibited by plastic colored with the pigment prepared from a crude pigment violet 23 containing from 5 to 10 wt.% of

the equivalent plastic colored with the pigment prepared from crude pigment containing <1 wt.% of the same compound(s).

Example 1

10 Preparation of the Carbazole Violet crude was carried out as described in U.S. Patent No. 4,345,074 with the exception that upon completion of the synthetic process, the reaction mixture was cooled to 90 C and filtered. The dichlorobenzene-saturated filter cake was slurried in methanol, re-filtered,
15 washed with methanol then with water. After drying, the crude Carbazole Violet was conditioned (i.e. pigmented) by various well known procedures as described in U.S. Patent No. 4,345,074. Such procedure resulted in a Pigment Violet 23 containing 5 to 10 wt.% of the mixture of (1), (2) and (3) which exhibited
20 increased heat stability when dispersed in polyethylene or polypropylene, relative to the product generated by Example 2.

Example 2

(Comparative)

25 Preparation of the Carbazole Violet crude was carried out as described in Example 1. The reaction mixture was cooled to 100 C, filtered hot, rinsed with o-dichloro-benzene, then warmed to 100 C until the filtrates became colorless. The filter cake was then slurried in o-dichlorobenzene, warmed to 170 C for 1
30 hour, then cooled to 100 C and filtered. The filtrate was then rinsed with additional hot dichlorobenzene until the filtrate

dichlorobenzene, and finally with 50 C water. The wet filtercake was dried in an oven. The crude was pigmented by various procedures as described in U.S. Patent No. 4,345,074. These procedure resulted in a pigment containing <1 wt.% of a mixture
10 of by-product compounds (1), (2) and (3) and exhibited decreased heat stability when dispersed in polyethylene or polypropylene relative to the product generated by Example 1.


In a high-speed, high-shear/temperature polypropylene
15 dispersion system, the product (Example 2) from the pigment containing <1 wt.% of at least one of compounds (1), (2) or (3) exhibited a loss in color strength of approximately 10% when compared, under identical conditions, to the equivalent product (Example 1) prepared from the pigment containing 5 to 10 wt.% of
20 at least one of compounds (1), (2) or (3), during a processing period of 30 seconds to 180 seconds. Additionally, the coloristic properties of the product in Example 2 were more adversely affected. Specifically, Da and Db of the product in Example 2 changed by -2.5 units and +1.4 units, respectively,
25 relative to the corresponding color coordinates of the product in Example 1. Therefore, during the process of plastic compounding, a trend is observed. The products obtained from the less stabilized pigments were greener, yellower and weaker and therefore less desirable commercially than the products
30 obtained from the more stabilized pigments.

Example 3


(3) were added to nine parts of a purified carbazole violet crude. To this was added 100 parts of sodium chloride grinding agent and 18 parts of diethylene glycol. The material was mixed in a kneader for 5 hours, then slurried in 1000 parts of water
10 at 85 to 90 C for one hour. The slurry was filtered, rinsed with water, then oven dried. The resulting pigment had increased heat stability comparable to that of the product from Example 1.

The invention has been described in terms of preferred embodiments thereof, but is more broadly applicable as will be
15 understood by those skilled in the art. The scope of the invention is only limited by the following claims.

1. A process for improving the heat stability of Pigment Violet 23 having the formula:

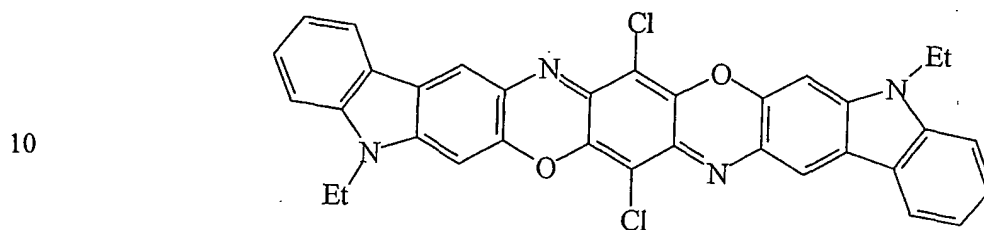

comprising conditioning said pigment in the presence of about 1 to about 10 wt.%, relative to the weight of the crude pigment, of at least one compound selected from the group consisting of:

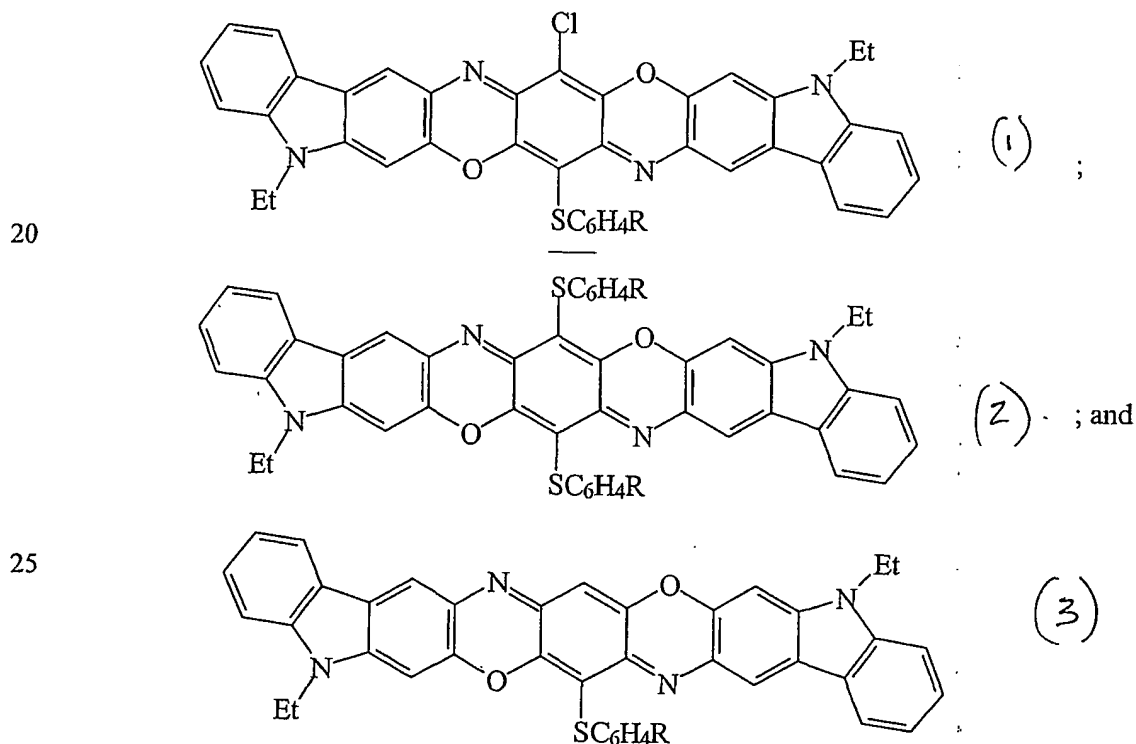

30 wherein each R is independently selected from either H or CH₃.

2. The process of claim 1 wherein the conditioning is carried out by grinding the crude pigment in the presence of a grinding agent and an organic solvent.

10 3. The process of claim 2 wherein the grinding agent is sodium chloride.

4. The process of claim 2 wherein the organic solvent is diethylene glycol.

15

5. The process of claim 1 wherein carrying out said conditioning is carried out in the presence of about 5 to 8 wt.% of at least one of said compounds (1), (2) or (3).

20 6. A process for increasing surface area of Pigment Violet 23 comprising conditioning said pigment according to the process of claim 1.

25 7. A heat stable Pigment Violet 23 prepared according to the process of claim 1.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
11 July 2002 (11.07.2002)

PCT

(10) International Publication Number
WO 02/053654 A3

(51) International Patent Classification⁷: **C09B 67/22**,
67/04

OH 45255 (US). **MCLAREN, George**; 8595 E. Jonathan
Lane, Maineville, OH 45039 (US). **SCHWARTZ, Russell**,
J.; 8300 Monte Drive, Montgomery, OH 45242 (US).

(21) International Application Number: PCT/US02/00045

(22) International Filing Date: 4 January 2002 (04.01.2002)

(74) Agent: **PERSLEY, Sidney**; 222 Bridge Plaza South, Fort
Lee, NJ 07024 (US).

(25) Filing Language: English

(81) Designated States (*national*): BR, CA.

(26) Publication Language: English

(84) Designated States (*regional*): European patent (AT, BE,
CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC,
NL, PT, SE, TR).

(30) Priority Data:
09/755,494 5 January 2001 (05.01.2001) US

Published:

— with international search report

(71) Applicant: **SUN CHEMICAL CORPORATION**
[US/US]; 222 Bridge Plaza South, For Lee, NJ 07024
(US).

(88) Date of publication of the international search report:
13 February 2003

(72) Inventors: **SMITH, Norman**; 1085 Newcastle Drive,
Cincinnati, OH 45231 (US). **CHAMBERLAIN, Ter-**
rence; 11710 Laurelvew Drive, Montgomery, OH 45249
(US). **BERG, Barbara**; 1467 Sigma Circle, Cincinnati,

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.



WO 02/053654 A3

(54) Title: PREPARATION OF HEAT STABLE PIGMENT VIOLET 23

(57) Abstract: A process for improving the heat stability of Pigment Violet 23 by conditioning crude Pigment Violet 23 in the presence of about 1 to 10 wt.% of Pigment Violet 23 by-products (1, 2 and 3).

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 02/00045

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 C09B67/22 C09B67/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 C09B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, CHEM ABS Data, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 345 074 A (HUFNAGEL THEOBALD ET AL) 17 August 1982 (1982-08-17) cited in the application the whole document ---	1-7
A	EP 0 504 923 A (HOECHST AG) 23 September 1992 (1992-09-23) the whole document ---	1-7
A	US 3 929 719 A (PUGIN ANDRE ET AL) 30 December 1975 (1975-12-30) abstract column 7; examples 4,6,10,11; table 3 ---	1-7
A	FR 2 404 031 A (HOECHST AG) 20 April 1979 (1979-04-20) page 3, paragraph 2; examples --- -/--	1-7



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

16 August 2002

Date of mailing of the international search report

27/08/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl.
Fax: (+31-70) 340-3016

Authorized officer

Dauksch, H

INTERNATIONAL SEARCH REPORT

ational Application No
PCT/US 02/00045

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 946 560 C (HOECHST AG) 2 August 1956 (1956-08-02) example 3 ---	1-7
A	EP 0 685 530 A (NIPPON KAYAKU KK) 6 December 1995 (1995-12-06) abstract ---	1-7
A	US 5 298 076 A (BAEBLER FRIDOLIN) 29 March 1994 (1994-03-29) abstract -----	1-7

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 02/00045

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4345074	A	17-08-1982	DE 3010949 A1	01-10-1981
			DE 3161209 D1	24-11-1983
			EP 0036966 A2	07-10-1981
			JP 56145951 A	13-11-1981
EP 0504923	A	23-09-1992	DE 59207080 D1	17-10-1996
			EP 0504923 A1	23-09-1992
			JP 5112732 A	07-05-1993
			KR 229774 B1	15-11-1999
			US 5318627 A	07-06-1994
US 3929719	A	30-12-1975	CH 578026 A5	30-07-1976
			AU 6225273 A	08-05-1975
			BE 807130 A1	09-05-1974
			CA 1009403 A1	03-05-1977
			DE 2355694 A1	16-05-1974
			ES 420395 A1	01-09-1976
			FR 2206354 A1	07-06-1974
			GB 1424209 A	11-02-1976
			IT 999296 B	20-02-1976
			JP 50000047 A	06-01-1975
			NL 7315333 A	14-05-1974
FR 2404031	A	20-04-1979	DE 2742575 B1	08-02-1979
			BR 7806160 A	17-04-1979
			CH 635863 A5	29-04-1983
			FR 2404031 A1	20-04-1979
			GB 2004905 A ,B	11-04-1979
			IN 149992 A1	26-06-1982
			JP 1409118 C	24-11-1987
			JP 54056630 A	07-05-1979
			JP 62012260 B	17-03-1987
			MX 149369 A	28-10-1983
DE 946560	C	02-08-1956	NONE	
EP 0685530	A	06-12-1995	CN 1113505 A ,B	20-12-1995
			DE 69514415 D1	17-02-2000
			DE 69514415 T2	24-08-2000
			EP 0685530 A1	06-12-1995
			JP 8048687 A	20-02-1996
			TW 412536 B	21-11-2000
			US 5734050 A	31-03-1998
			US 5859242 A	12-01-1999
US 5298076	A	29-03-1994	CA 2119551 A1	24-09-1994
			DE 69424962 D1	27-07-2000
			DE 69424962 T2	09-11-2000
			EP 0617090 A2	28-09-1994
			JP 6322284 A	22-11-1994